


894-960 Mz Single Cavity Filter : 894-960 MHz Single Cavity Filter

Marti single cavity filters are useful to minimize interference from nearby frequencies. Two and three cavity filters are available upon request.

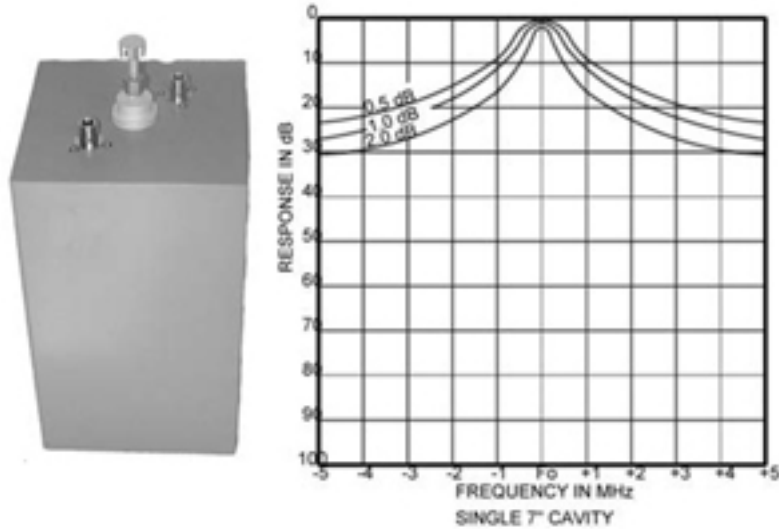

GENERAL SPECIFICATIONS

Connector:
50 Ohm "N" female

Frequency Band:
894-960 MHz

Power Rating:
200W

Temperature Range:
-30 to 60 degrees C.

VSWR:
1.5:1 or better

PHYSICAL SPECIFICATIONS

Shipping Weight:
12 lbs

Electrical Length:
3/4 lamda

Cavity Dimensions:
7" x 7"

SPECIAL NOTES

Specify operating frequency and coupling factor with order. Excludes rack mount panel. Power rating based on 1dB insertion loss setting. Specifications are subject to change without notice.